


APCD100 Data Sheet

4" x 4" Auto Prime Pump

Pump and parts 100% interchangeable with the Godwin CD Series®

Performance Curve

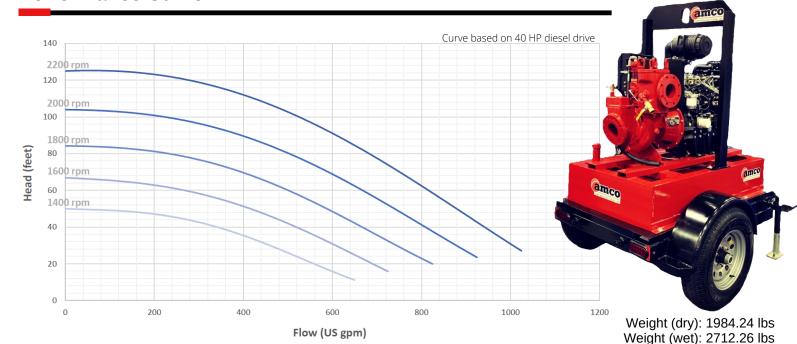

General Specifications

Suction Connection	4 in (100 mm) Flange
Delivery Connection	4 in (100 mm) Flange
Max Flow	1010 USGPM (65 L/s)*
Max Head	125 ft (38m)
Max Solids Handling	1 3/4 in (45 mm)
Fuel Capacity	100 US Gal (416 L)
Impeller Diameter	9.1 in (230 mm)

Options

- Diesel or Electric Drive
- Integrated Fuel Tank Skid Mount
- Custom DOT Trailer Options
- Quiet Pack: Sound Enclosure to 69 dBA at 30'



Features

- Automatically primes up to 28 ft (8.5 m) of suction lift from dry
- Liquid bath mechanical seal design extended dry-running time
- Durably constructed using Cast Iron, Steel and CDM4CU material
- 12-month standard warranty
- Suitable for many applications. Industries we serve include:











Dimensions: 44" w x 113" l x 84" h



WATER

OIL & GAS WATER PARK

713-690-7575 sales@amcopumps.com www.amcopumps.com 4849 Cranswick Rd Houston TX 77041

Quality Pumps, For Less. By Professional Pump People.