





APCD150 Data Sheet

Auto Prime Pump

Pump and parts 100% interchangeable with Godwin CD Series®

Performance Curve

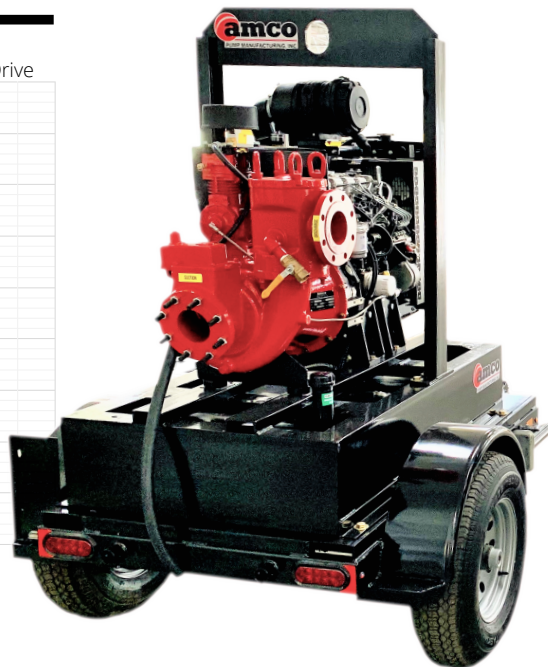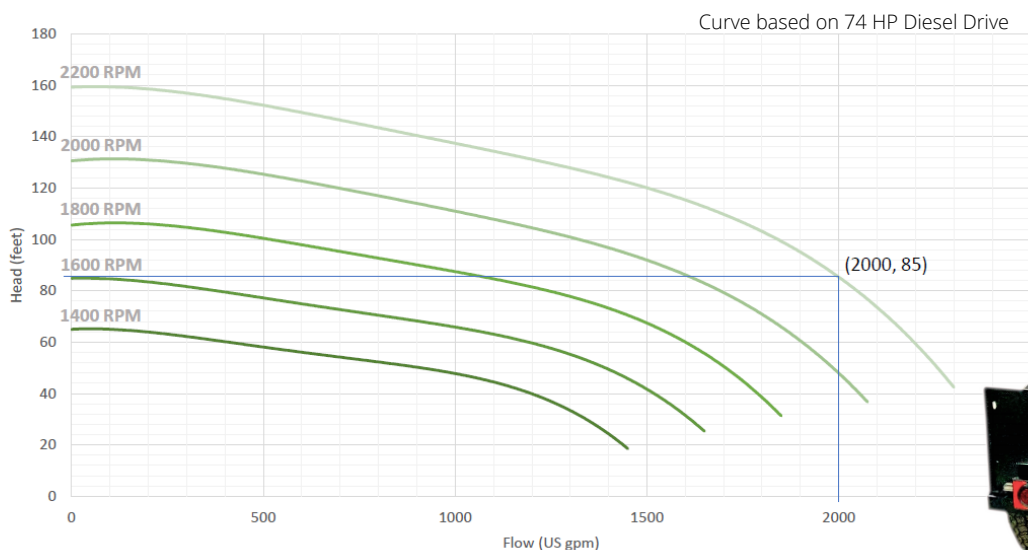

General Specifications

Suction Connection	6<8 in Flange
Delivery Connection	6<8 in Flange
Max Flow	2298 USGPM (63 L/s)*
Max Head	160 ft (49 m)*
Max Solids Handling	3 in (75 mm)
Fuel Capacity	100 US Gal (416 L)
Impeller Diameter	11.02 in (280 mm)

Options

- Diesel or Electric Drive
- Integrated Fuel Tank
- Skid Mount
- Custom DOT Trailer
- Options
- Sound Enclosure to 69 dBA at 30'



Features

- Automatically primes up to 28 ft (8.5 m) of suction lift from dry
- Liquid bath mechanical seal design extended dry-running time
- Durably constructed using Cast Iron, Steel and CDM4CU material
- 12-month standard ltd. warranty applies
- Suitable for many applications. Industries we serve include:



CONSTRUCTION



INDUSTRIAL



MARINE



MINING



OIL & GAS



WATER PARKS



WATER TREATMENT

713-690-7575

sales@amcopumps.com

www.amcopumps.com

4849 Cranswick Rd

Houston TX 77041

Quality Pumps, For Less. By Professional Pump People.